


Pro-Two 2 Wire Controller

FEATURES

- 1 - 16 Stations.
- Two Wire Technology with unlimited Tees and Crosses in two wire path.
- Utilizes standard 18/2 wire with a maximum 2,000 foot run (measured by most direct two wire path from Controller to Valve).
- A P2-D Decoder is used at each valve. Decoder is programmable at Controller to any valve number from 1 to 16 or MV/PS.
- A maximum of 2 Decoders can operate simultaneously of the same or different numbers plus a Master Valve or Pump Start Relay.
- P2-D Decoder is shipped with two approved waterproof wire connectors (#DBC-BR) to be used for the Decoder connections to the two wire path.
- System is compatible with all standard irrigation valve solenoids rated with a 350Ma inrush and 250Ma holding current.
- Decoders are purchased separate from Controller and are supplied with number identification tags #1 - #16 and MV / PS to identify each valve in the field to its corresponding Controller valve number.
- 6 Independent Programs.
- ODD / EVEN or Weekly Calendar.
- Water Budget by Program.
- Individual Valve Run Times can be in minutes and hours or seconds and minutes in program.
- Up to 6 Start Times per Program.
- Can Operate in Automatic, Semi Automatic and Manual modes.
- Programmable Rain Delay.

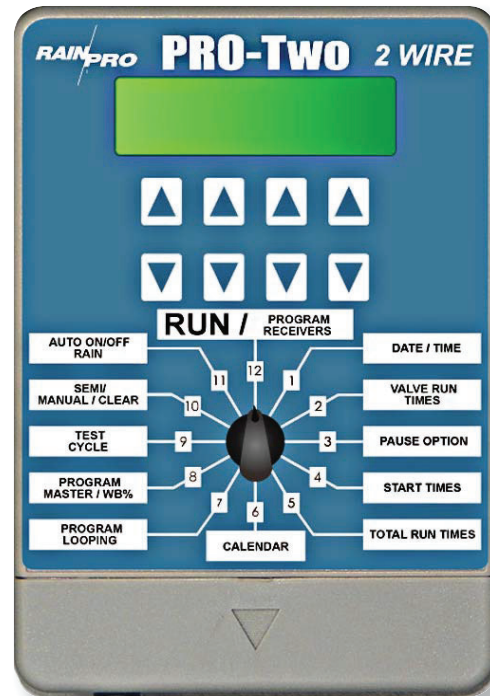

P2-I
ProTwo 2 wire 16 station indoor controller



P2-D
ProTwo 2 wire decoder



DBC-BR
Logic receiver waterproof brass splice kit with direct bury gel filled housing for receiver to Two-wire path connection.

ORDER SPECIFICATION GUIDE : Model

Model

- P2 = Outdoor ProTwo 2 wire 16 station Controller
 P2-I = Indoor ProTwo 2 wire 16 station Controller
 P2-D = ProTwo 2 Wire Decoder

