


900T Series Telescopic Pop-Up

FEATURES


- Double acting telescoping piston
- Two independent heavy duty stainless steel retraction springs
- Integrally molded "Leak-Stopper" gaskets prevent any body-cap leaks
- Designed for shallow trench and labor savings
- Patented Lateral discharging flush plug to aid installation
- High impact virgin ABS plastic construction of body, pistons and cap
- Spring-loaded ratchet on all models for directional adjustment of spray pattern
- Side inlet on 913T
- 7" pop-up has a overall retracted body height as 4" pop-up body 900 Series
- 13" pop-up has a overall retracted body height as 6" pop-up body 900 Series
- 7" pop-up can be field retrofit into HIT 900 Series 4" body or Rainbird™ 1804 body
- 13" pop-up can be field retrofit into HIT 900 Series 6" body or Rainbird™ 1806 body

OPERATING SPECIFICATIONS


- Operating pressure range: 20-70 PSI, 25-70 PSI with CKV
- Recommended working pressure: 30 PSI
- Recommended working pressure with PRD: 30-70 PSI

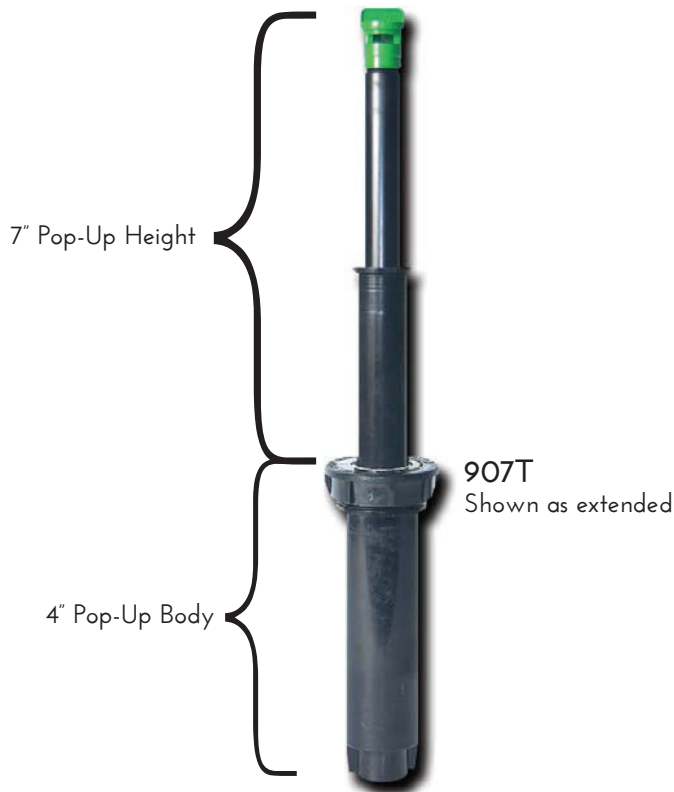


PRD-30 Performance Graph Standard

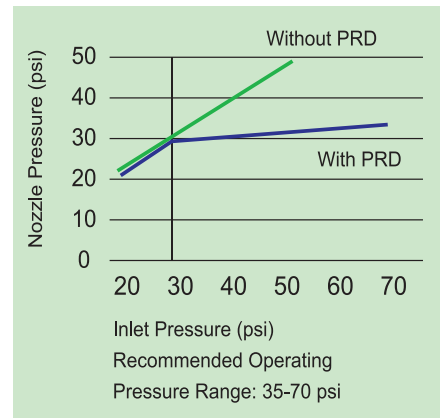

PRD-40 Performance Graph

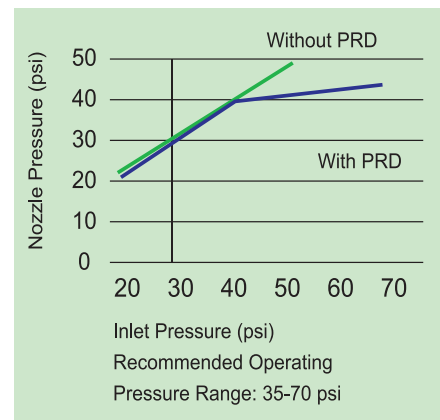

PRD-45 Performance Graph

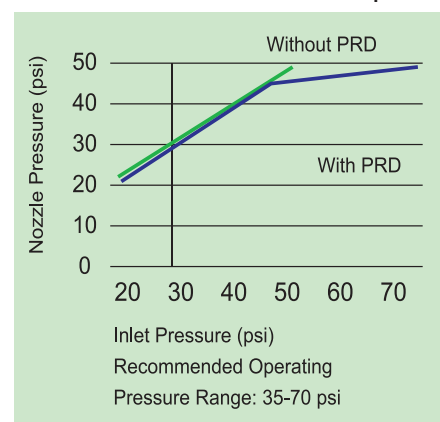

900T Series Telescopic Pop-Up

DIMENSIONS


- 1/2" female pipe thread on bottom inlet
- Male threaded piston to accept fixed or adjustable arc nozzles with female threads



907T
 Body Height: 4" Pop-Up Body
 Pop-Up Height: 7"
 Exposed Surface Diameter: 2 1/8"



913T
 Body Height: 6" Pop-Up Body
 Pop-Up Height: 13"
 Exposed Surface Diameter: 2 1/8"
 • Side Inlet

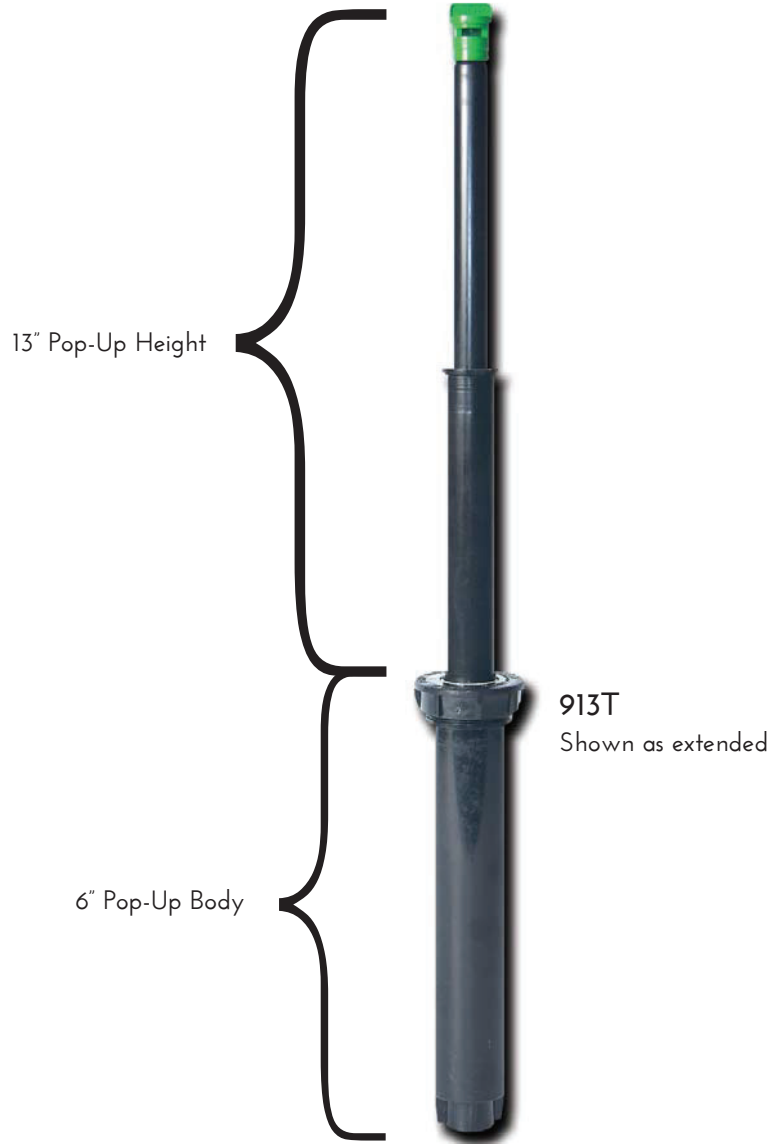

913T
 Shown as extended

OPTIONS AVAILABLE

- Check Valve (CKV): holds up to 14 feet of head
- In stem pressure regulating device (PRD)
 - PRD-30 (30 PSI Outlet)
 - PRD-40 (40 PSI Outlet)
 - PRD-45 (45 PSI Outlet)
- Reclaimed purple cap

ORDER SPECIFICATION GUIDE : Model + Option1 + Option2 + Option3

Model	Option 1	Option 2	Option 3
907T = 7" Pop-Up	Blank = No Option	Blank = No Option	Blank = Black Cap
913T = 13" Pop-Up	CKV = Check Valve	PRD 30 = 30 PSI	R = Reclaimed Purple Cap
913TS = 13" Pop-Up with Side Inlet		PRD 40 = 40 PSI	
		PRD 45 = 45 PSI	

Examples

- 907T = 7" Pop-up only
- 907T - CKV - PRD45 = 7" Pop-Up with a Check Valve and 45 PSI Pressure Regulator
- 913T - PRD30 - R = 13" Pop-Up with a 30 PSI Pressure Regulator and Purple Cap

